

DATA SPECIFICATION (特性要求): (TABLE-1)

ITEM 项目	MEASUREMENTS 测 试 脚位	CHARACTERISTICS 测试范围 MEASURING CONDITIONS 测试条件 T=25±4℃;HR(%)=45±15		REMARK 备注		
Ls 电感	PIN(1-4)	3.2mH±10%	F(KHz) = 1 Ug(V) = 0.25	SERIAL MODE 串 联 模 式		
DCR 直流电阻	PIN(1-4)	1.8Ω MAX.	/	SERIAL MODE 串 联 模 式		
HIPOT 耐压	COIL/CORE	NO BREAKDOWN 漏 电 流≤5mA	VAC=500V /3SEC. F(Hz) =60	/		
IR 绝缘电阻	COIL/CORE	100MΩ MIN.	DC500V	/		
PH 相位	REFER TO LAYOUT DIAGRAM (FIG-1) 參考原理图(FIG-1)					


Prepared By ENG:	Date:	TITI E.	CUSTOMER	MODEL NO.:EE20		
Checked By QA:	Date:	IIILE.	Approved:	REV.	00	
Approved By ENG:	Date:	TRANSFORMER	Date:	PAGE 1 OF 3		





OUTLINE DIAGRAM (外观图)

UNIT: mm

Tolerance unless otherwise specified: ±0.5

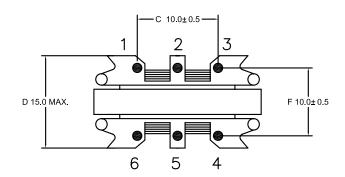

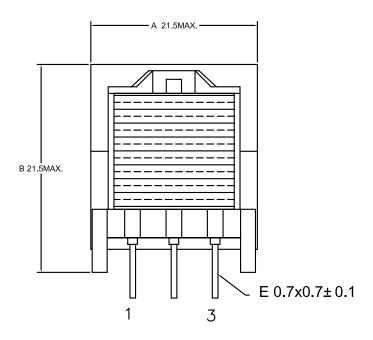


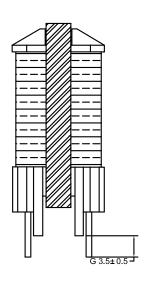

NOTES:

- 1. The core are to be held with 2 layers 5.5mm width tape; 在铁芯上包2 圈5.5mm宽的胶纸;
- 2. The comonent must be impregnated in varnish#642; 产品需含浸凡立水#642;
- 3. YYWW: YEAR AND WEEK CODE. (FIG-5) YYWW: 年份周期代码. (FIG-5)

Prepared By:	Date :	TITLE	:	CUSTOMER	MODEL NO.: EE20			
Checked By :			Do	Approved:	REV.:		00	
Approved By:		TRA	NSFORMER:	Date:	PAGE	2	OF	3

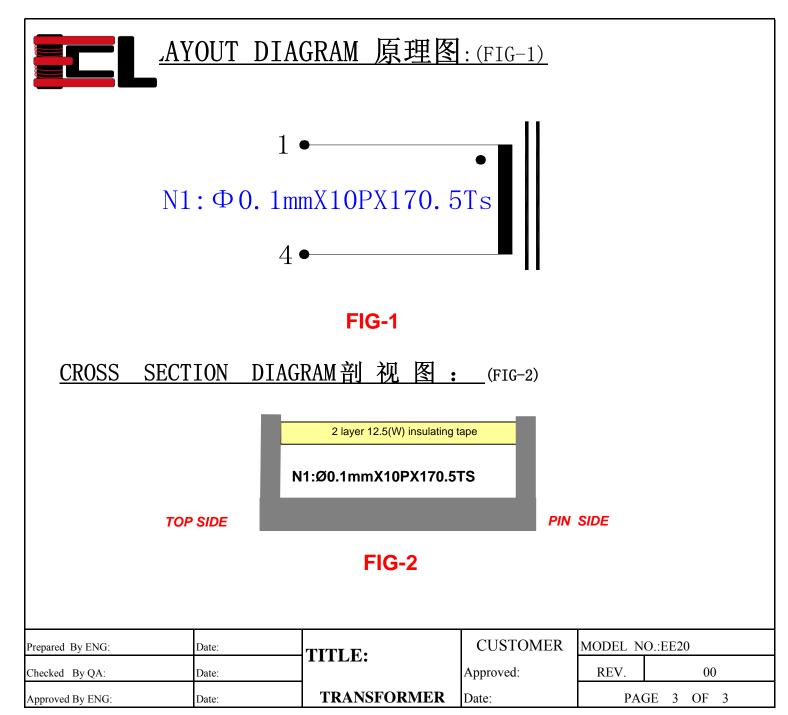

免责条款 Disclaimer

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer.

依美电感保留更改产品资料和外观的最终权利而无需事先通知。如有任何争议,依美电感保留最终决定权。此中文免责条款为英文版本译本,如中、英文两个版本有任何抵触或不相符之处,应以英文版本为准。