



LAYOUT DIAGRAM (原理圖) : (FIG-1)

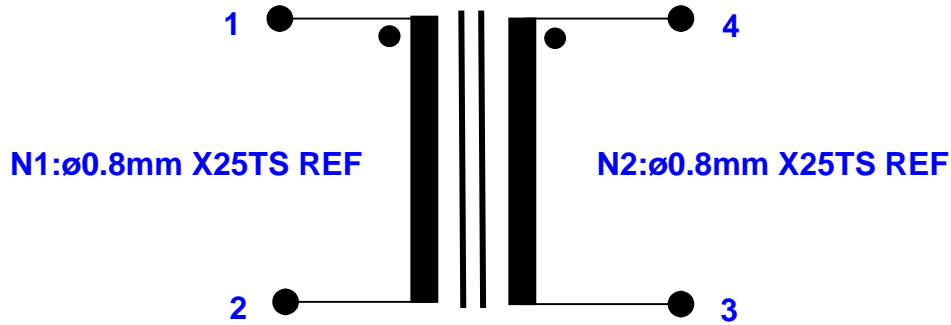


FIG-1

DATA SPECIFICATION(特性要求) : (Table-2)

ITEM 項目	MEASUREMENTS 测试腳位	CHARACTERISTICS 测试範圍	MEASURING CONDITIONS 測試條件 T(°C)=25± 3; HR(%)=45± 15	REMARK 備注
LS 电感	PIN(1-2)	2.0mH MIN.	F(kHz) =10 Ug(V) =0.1	SERIAL MODE 串联模式
	PIN(4-3)	2.0mH MIN.	F(kHz) =10 Ug(V) =0.1	SERIAL MODE 串联模式
DCR 直流电阻	PIN(1-2)	70mΩ MAX.	/	4 WIRE MODE 四线模式
	PIN(4-3)	70mΩ MAX.	/	4 WIRE MODE 四线模式
HIPOT 耐压	PIN(1-2)/(4-3)	NO BREAKDOWN 漏电流≤5.0mA	VAC=2000V /60SEC.	
PH 相位	REFER TO LAYOUT DIAGRAM FIG-1 参考原理图 (FIG-1)			

Prepared By ENG:	DATE:	TITLE: CHOKER	CUSTOMER	MODEL NO:TP4XXX-03	
Checked By QA:	DATE:		Approved:	REV.	00
Approved By ENG:	DATE:		Date:	PAGE 1 OF 2	